


# D-sub 9 Connector Pinout

Pinout and diagram of DE9 connector (DB9 connector), commonly used for serial ports (RS-232).

Pin	SIG.	Signal Name	DTE (PC)
1	DCD	Data Carrier Detect	in
2	RXD	Receive Data	in
3	TXD	Transmit Data	out
4	DTR	Data Terminal Ready	out
5	GND	Signal Ground	-
6	DSR	Data Set Ready	in
7	RTS	Request to Send	out
8	CTS	Clear to Send	in
9	RI	Ring Indicator	in

The DTE (PC) has the male connector (shown below), and the DCE (peripheral) has the female.

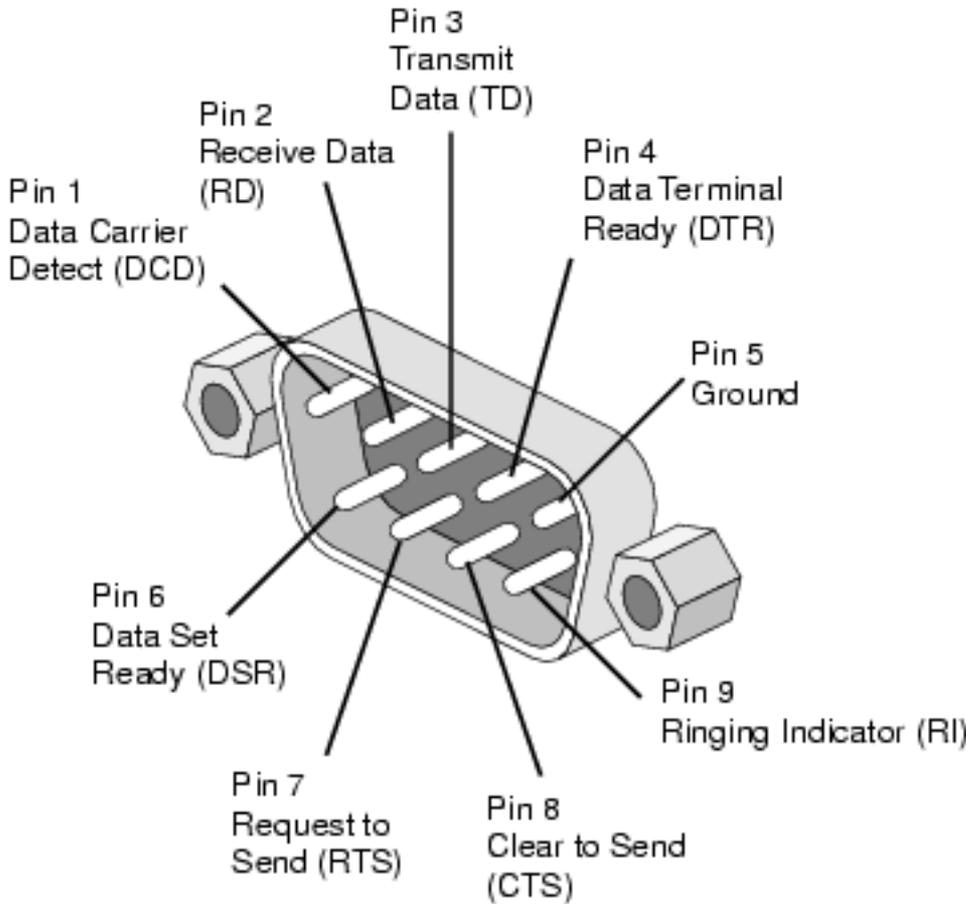

## RS-232 Maximum Cable Length

The maximum cable length for RS-232 is 50ft, but in

practise depends on baud rate, cable specific capacitance and ambient noise. The table below contains some rules-of-thumb from experiments done by Texas Instruments years ago.

<b>Baud rate</b>	<b>Maximum range / cable length</b>
19200	50ft
9600	500ft
4800	1000ft
2400	3000ft

Questions, comments ==> [info \(at\) \(this domain\)](mailto:info@thisdomain)